
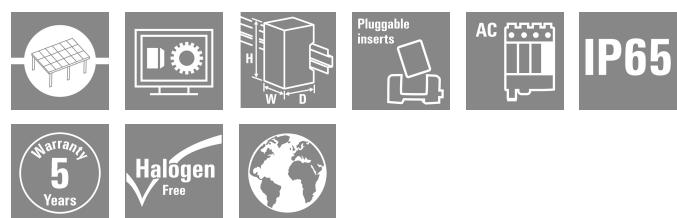


PV CPC16TXUXDXAXWXR2WW

Weidmüller Interface GmbH & Co. KG
 Klingenbergsstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

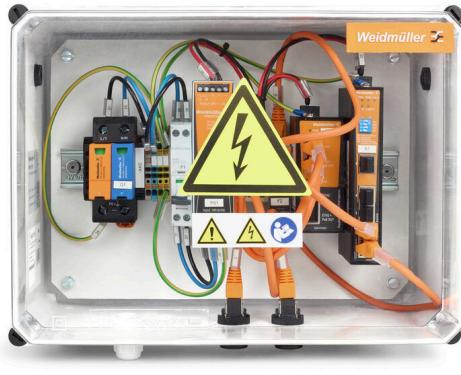

Connecting photovoltaic power plants through reliable and safe industrial communications.

Weidmüller combined its extensive experience with photovoltaic projects and industrial communication to create this portfolio of PV Communication Boxes. For this portfolio we developed 2 different product ranges:

- The "Premium" family is our most robust product. Designed to offer constant connectivity thanks to its backup power system. And thereby offers you reliability and power in one solution.
- The new "Lite" family offers you the same signal connectivity on site as the "Premium" version, but in a more compact version.

General ordering data

Version	Photovoltaics, Assembled enclosure, Communication module, 230 V AC, Surge protection I, Battery powered, Current monitoring, Monitoring components, Limit value monitoring, Communication Box, RJ45, PoE
Order No.	8000135184
Type	PV CPC16TXUXDXAXWXR2WW
GTIN (EAN)	4099987006750
Qty.	1 items

PV CPC16TXUXDXAXWXR2WW

Weidmüller Interface GmbH & Co. KG
 Klingenbergsstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data**Approvals**

Approvals



ROHS Conform

Dimensions and weights

Depth	180 mm	Depth (inches)	7.0866 inch
Height	270 mm	Height (inches)	10.6299 inch
Width	360 mm	Width (inches)	14.1732 inch
Net weight	4326.69 g		

Temperatures

Ambient temperature -20 °C...35 °C

Environmental Product Compliance

RoHS Compliance Status	Compliant with exemption
RoHS Exemption (if applicable/known)	6al, 7a, 7cl
REACH SVHC	Lead 7439-92-1

DC electrical properties

Rated voltage	230 V	Surge protection AC side	PU I 1+1 LCF 280V/12,5kA, without auxiliary contact
Earthing	Directly at the VPU	Surge protection WIA RS485 side (string monitoring)	No

DC string monitoring

Supply	Battery PRO ECO 72W 24V 3A	Monitoring function	Industrial Ethernet managed switch with RJ45 ports, Industrial PC, PoE unmanaged injector, Connection between field devices to SCADA through RS-485
--------	-------------------------------	---------------------	---

Classifications

ETIM 8.0	EC003857	ETIM 9.0	EC003857
ETIM 10.0	EC003857	ECLASS 14.0	22-57-02-92
ECLASS 15.0	22-57-02-92		

PV CPC16TXUXDXAXWXR2WW

Weidmüller Interface GmbH & Co. KG
Klingenbergsstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

