


RS SD25 BZ**Weidmüller Interface GmbH & Co. KG**Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

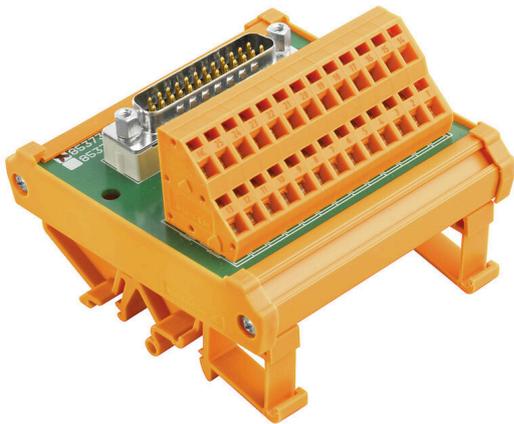

Similar to illustration

Passive interfaces for signal transmission on a SubD connector equipped with a tension-clamp connection in accordance with IEC 807-2 / DIN 41652. The main features include:

- Group with 9-, 15-, 37- and 50-pole male and female connectors.
- One-to-one electrical connection between controller and field connections.
- Extremely compact modules for attachment to standard TS35 or TS32 rail.

General ordering data

Version	Interface, RSSD, D-sub connectors, acc. to IEC 60807 / DIN 41652, 25-pole female, Tension-clamp connection
Order No.	8537380000
Type	RS SD25 BZ
GTIN (EAN)	4032248173068
Qty.	1 items

RS SD25 BZ

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Approvals

Approvals



ROHS	Conform
UL File Number Search	UL Website
Certificate No. (UR)	E141197

Dimensions and weights

Depth	64 mm	Depth (inches)	2.5197 inch
Height	87 mm	Height (inches)	3.4252 inch
Width	80 mm	Width (inches)	3.1496 inch
Net weight	160 g		

Temperatures

Storage temperature	-40...70 °C	Operating temperature	0...55 °C
---------------------	-------------	-----------------------	-----------

Environmental Product Compliance

RoHS Compliance Status	Compliant with exemption
RoHS Exemption (if applicable/known)	6aI, 6c
REACH SVHC	Lead 7439-92-1
SCIP	7b5ffb72-271d-4c73-8b09-bd0aaee3697a

Rated data UL

Rated current IN	1 A	Operating temperature UL, min.	0 °C
Operating temperature UL, max.	25 °C	Rated voltage UN	100 V

Connection Data

Design of locking system	UNC 4/40	Number of poles (control side)	25-pole female
Connection (field side)	LM2NZF 5.08mm	Earthing	No
Connection on control side	D-sub connectors, acc. to IEC 60807 / DIN 41652		

Rating data

Rated voltage	100 V	Rated current per connection	1.5 A
---------------	-------	------------------------------	-------

Insulation coordination (EN50178)

According to	DIN EN 50178	Rated insulation voltage	100 V
Surge voltage category	II	Pollution severity level	2
Pulse voltage test (1,2/50µs)	0.8 kV		

Connection field

Min. wire cross-section, AWG	AWG 24	Type of connection	Tension-clamp connection
Sleeve with plastic collar, max.	1.5 mm ²	Flexible with sleeve, min.	0.25 mm ²
Flexible with sleeve, max.	1.5 mm ²	Flexible, max. H05(07) V-K	1.5 mm ²
Flexible, min. H05(07) V-K	0.2 mm ²	Solid, max. H05(07) V-U	2.5 mm ²

RS SD25 BZ

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data


Solid, min. H05(07) V-U	0.2 mm ²	Stripping length	7.5 mm
Clamping range, max.	2.5 mm ²	Clamping range, min.	0.13 mm ²
Max. wire cross-section, AWG	AWG 14		

Standard features

Design	Socket connector
--------	------------------

Classifications

ETIM 8.0	EC002780	ETIM 9.0	EC002780
ETIM 10.0	EC002780	ECLASS 14.0	27-14-11-52
ECLASS 15.0	27-14-11-52		



N: Number of poles

RS SD25 BZ

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

Steel




Steel DIN rails are the most widespread on the market. Among metal DIN rails, they have the lowest shortcircuit protection, similar to stainless steel.

General ordering data

Type	TS 32X15 2M/ST/ZN	Version	
Order No.	0122800000	Terminal rail, Accessories, Steel, galvanic zinc plated and passivated,	
GTIN (EAN)	4008190066307	Width: 2000 mm, Height: 33 mm, Depth: 15 mm	
Qty.	20 M		

End bracket

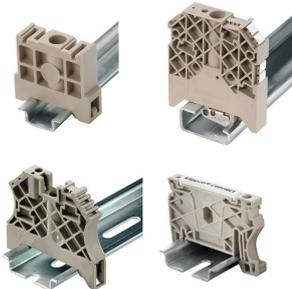

Weidmüller's range of products includes end brackets that guarantee a permanent, reliable mounting on the terminal rail and prevent sliding. Versions with and without screws are available. The end brackets include marking options, also for group markers, and also a test plug holder.

General ordering data

Type	EWK 2	Version	
Order No.	0199360000	End bracket, beige, TS 32, V-0, Wemid, Width: 15 mm, 100 °C	
GTIN (EAN)	4008190023546		
Qty.	50 ST		

Steel



Steel DIN rails are the most widespread on the market. Among metal DIN rails, they have the lowest shortcircuit protection, similar to stainless steel.

General ordering data

Type	TS 35X7.5 2M/ST/ZN	Version	
Order No.	0383400000	Terminal rail, Accessories, Steel, galvanic zinc plated and passivated,	
GTIN (EAN)	4008190088026	Width: 2000 mm, Height: 35 mm, Depth: 7.5 mm	
Qty.	40 M		


RS SD25 BZ

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Accessories

End bracket

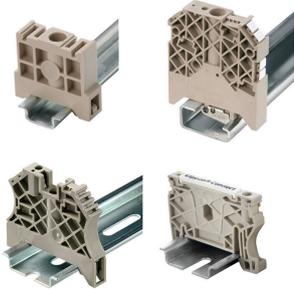

Weidmüller's range of products includes end brackets that guarantee a permanent, reliable mounting on the terminal rail and prevent sliding. Versions with and without screws are available. The end brackets include marking options, also for group markers, and also a test plug holder.

General ordering data

Type	EW 35	Version	
Order No.	0383560000	End bracket, beige, TS 35, V-2, Wemid, Width: 8.5 mm, 100 °C	
GTIN (EAN)	4008190181314		
Qty.	50 ST		

Steel



Steel DIN rails are the most widespread on the market. Among metal DIN rails, they have the lowest shortcircuit protection, similar to stainless steel.

General ordering data

Type	TS 35X15/2.3 2M/ST/ZN	Version	
Order No.	0498000000	Terminal rail, Accessories, Steel, galvanic zinc plated and passivated, Width: 2000 mm, Height: 35 mm, Depth: 15 mm	
GTIN (EAN)	4008190042493		
Qty.	20 M		